

MDRR-DT 14.7mm Miniature Changeover Reed Switch



Description

The MDRR-DT Reed Switch is a miniature changeover switch with a 14.73mm long x 2.54mm diameter (0.580" x 0.100") glass envelope, capable of switching 175Vdc at 5W. It has insulation resistance of 10⁹ ohms minimum, and contact resistance less than 100 milli-ohms. The MDRR-DT is available in surface mount version, that is, MDSM-DT.

Features

- Miniature SPDT changeover switch
- Capable of switching 175Vdc or 0.25A at up to 5W
- Available sensitivity range 10-30 AT

Benefits

- Hermetically sealed switch contacts are not affected by and have no effect on their external environment
- Can be used as changeover or normally closed contact
- Zero operating power required for contact closure
- Excellent for switching microcontroller logic level loads


Agency Approvals

| Agency | Agency File Number | Ampere-Turns Range |
|--------|--------------------|--------------------|
| | E47258 E471070 | 10-30 AT |

Note: Contact Littelfuse for specific agency approval ratings.

Dimensions

Dimensions in mm (inch)

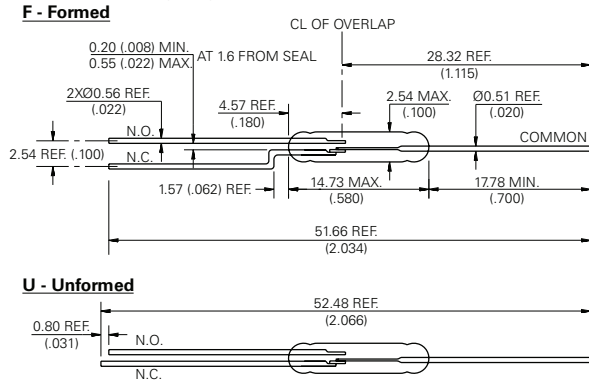

Applications

- Position Sensing
- Reed Relays
- Industrial Controls
- Office Equipments
- Home Appliances
- Security

Switch Type

| | |
|--------------|---|
| Contact Form | C (SPDT-CO) |
| Materials | Body: Glass Leads: Tin-plated Ni-Fe wire |

Note: SPDT-CO = Single-Pole, Double-Throw, Change Over

Electrical Ratings

| | | | |
|-----------------------------|-----------------------------------|--------------------------|-----------------|
| Contact Rating ¹ | | W/VA - max. | 5 |
| Voltage ³ | Switching ² | Vdc - max. | 175 |
| | Breakdown ⁴ | Vac - max. Vdc - min. | 120 200 |
| Current ³ | Switching ² | Adc - max. | 0.25 |
| | Carry | Aac - max. Adc - max. | 0.18 1.50 |
| Resistance | Contact, Initial Insulation | Ω - max. | 0.100 |
| | | Ω - min. | 10 ⁹ |
| Capacitance | Contact | pF - typ. | 1 |
| Temperature | Operating Storage ⁵ | °C | -40 to +125 |
| | | °C | -65 to +125 |

Notes:

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
3. Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.
4. Breakdown Voltage - per MIL-STD-202, Method 301.
5. Storage Temperature - Long time exposure at elevated temperature may degrade solderability of the leads.

MDRR-DT 14.7mm Miniature Changeover Reed Switch


Product Characteristics

| Operating Characteristics | | |
|---------------------------------|--------------------|----------------|
| Operate Time ¹ | | 0.7ms - max. |
| Release Time ¹ | | 1ms - max. |
| Shock ² | 11ms 1/2 sine wave | 50G - max. |
| Vibration ² | 50-2000 Hertz | 30G - max. |
| Resonant Frequency | | 11.0kHz - typ. |
| Magnetic Characteristics | | |
| Pull-In Range ³ | Ampere Turns | 10-30 |
| Rating Sensitivity ⁴ | Ampere Turns | 20 |
| Test Coil | | L4989 |

Notes:


- Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
- Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
- Pull-In Range - Contact Littelfuse for narrower AT ranges available.
- Rating Sensitivity - The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
- Custom modifications of forming and/or cutting of reed switches are available. Please contact Littelfuse.

Drop-Out vs. Pull-In Chart

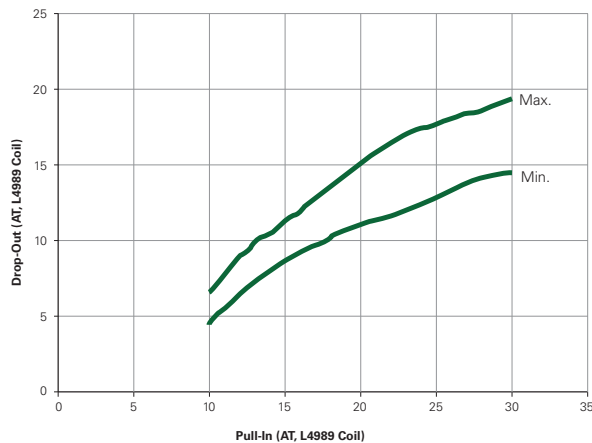

Note: Chart represents the range of Drop-Out, min to max for a given Pull-In value.

Part Numbering System

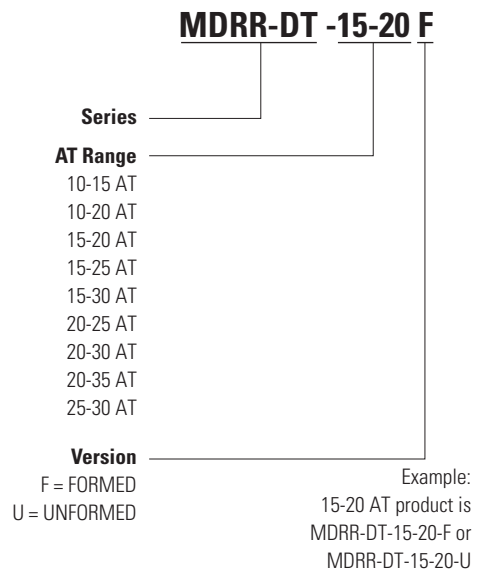

Note: These AT values are the before-modification values of the bare reed switch.

Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity and Packaging Code | Taping Width |
|------------------|-------------------------|----------|-----------------------------|--------------|
| Bulk | Bulk | 1000 | N/A | N/A |