


GSM Antenna Specification

Model: HR -GSM- GA7



(I) Product Overview

Frequency (MHz) : 824-960/1710-1990

Bandwidth (MHz) : 136/280

VSWR \leq 1.5

Gain (dBi) : 3.5

Max Input power (W) : 60

Input Impedance (Ω) : 50

Polarization : Vertical

Size (mm) : 115 \times 22 \times 4

Cable Length (m) : 2,3,5 etc.

Cable Type : RG174

Connector : SMA/SMB/SMC/BNC/FME/TNC/MCX/MMCX etc.

Mounting : Adhesive

Working Temp: -40°C~+85°C

Storage Temp: -45°C~+100°C

Vibration: Sine sweep 1g(0-p)10~50~10Hz each axis

(II) Characteristic curve

Shenzhen Hurryup Technology Co.,Ltd



Address : 21f Building B, Huaqiang Plaza, Huaqiang North Rd, Futian District, Shenzhen city, Guangdong, CHINA 518031

Tel : +86 (755) 33013161; Fax: +0086 755


83753556 E-mail : arin@hurryup.com.cn;

Visit us: <http://www.szhurryup.com>; <http://www.hurryupgps.com>

www.hurryup.com.cn

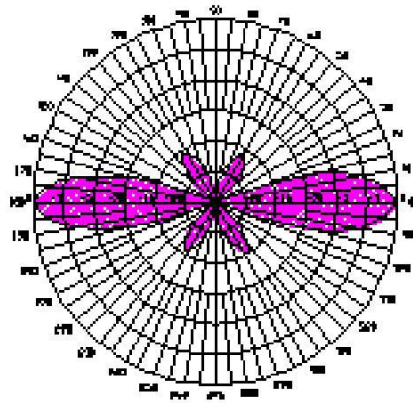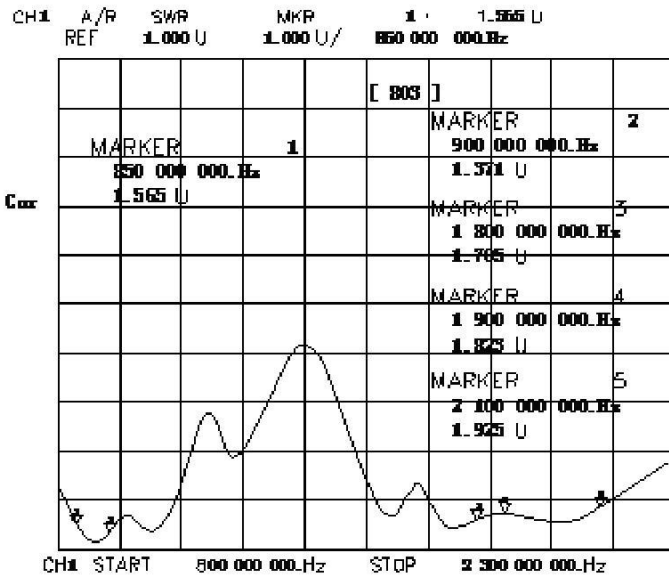

(III) Mechanical

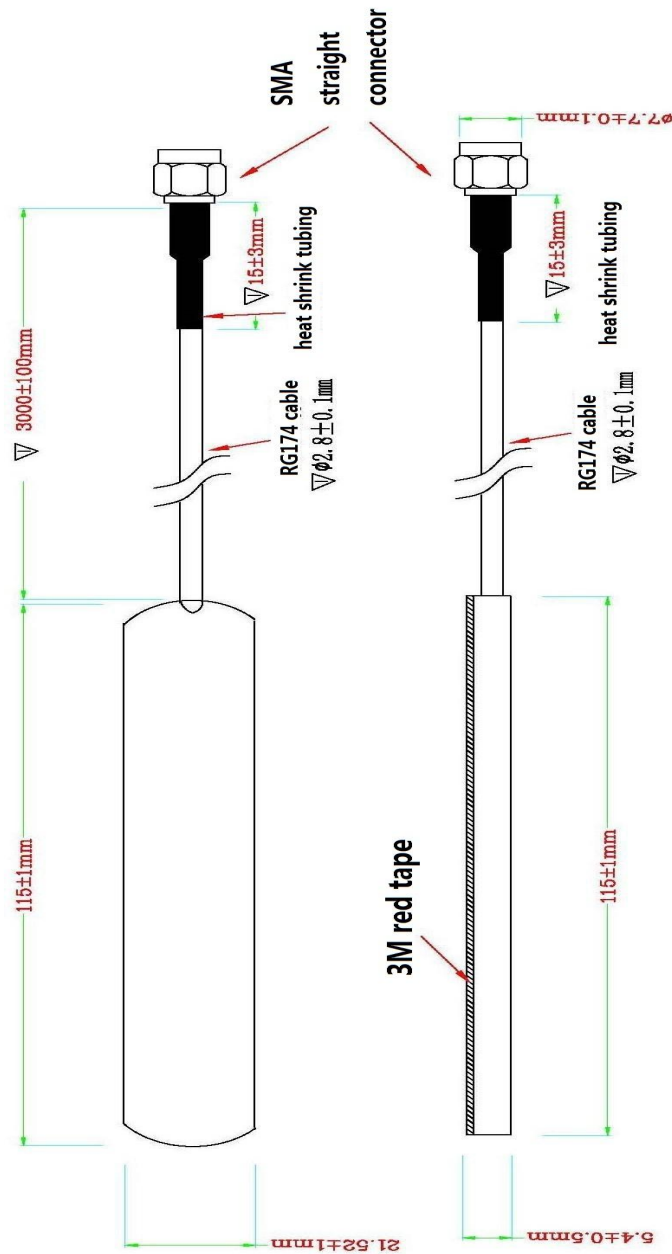

Shenzhen Hurryup Technology Co.,Ltd

Address : 21f Building B,Huaqiang Plaza,Huaqiang North Rd, Futian District,Shenzhen city, Guangdong, CHINA 518031

Tel : +86 (755) 33013161; Fax: +0086 755

83753556 E-mail : arin@hurryup.com.cn;

Visit us: <http://www.sz.hurryup.com>; <http://www.hurryupgps.com>

www.hurryup.com.cn